

New products and top promotions

Cordless. Limitless.

NEW! FLEX now for the garden tools Practical garden tools with 18 V battery power → Page 2

 NEW!
 18 V cordless metal band saws

 Perfectly balanced!

 → Page 7

FLEXPACK Now only € 799.00 plus VAT → Page 13



Promotions are valid until 31 August 2024 Only while stocks last and only from participating dealers

#1/2024

1⁸V

approx. 30 cm

FLEX now for the garden too

Cordless leaf blower GBL 790 18-EC



- Compact design, the lightest tool in its class, with 125 Ø mm air flow tube that can be removed without tools
- Air volume regulation in 3 stages with Boost mode for clearing leaves in small to medium-sized areas
- Compact and ergonomic design
- Ergonomically shaped soft handle with on/off switch and lock mechanism for continuous operation
- The electronic management system (EMS) protects the tool, extends its service life and increases efficiency





1x GBL 790 18-EC

Promotion No. 01

.74000



Order No. 531276 bar for fast cutting, e.g. for delimbing and in wood up to

1x GCS 35 2x18-EC



NEW

Order No. 531275

1x GHT 55 18-EC

Promotion No. 03

.74000

With recoil brake, stops the chain reliably in 0.12 seconds and transport lock With tool-free chain tensioning via rotary wheel and automatic chain lubrication

Powerful 2 x 18 V cordless chainsaw with a 35 cm saw

The sturdy metal claw fence fixes the saw to the wood,

making it easy to make cuts safely

Cordless hedge trimmer GHT 55 18-EC



- Lightweight and powerful hedge trimmer with rotating handle for optimum handling
- Bar length 55 cm, very powerful thanks to the double-sided dual-action laser-ground blade with a cutting capacity of 25 mm. The additional impact protection prevents the blades from being damaged by fences or walls.
- With a safety double switch to prevent unintentional startup of the hedge trimmer and an additional hand guard
- Electronic brake stops the tool in 3 seconds

Cordless lawn trimmer GLT 35 18-EC



- Powerful cordless lawn trimmer with a high cutting speed in 2 stages, for trimming green areas, removing tall grasses and light undergrowth, cutting width 30 cm.
- Thread head with "Easy load" simple adjustment of the thread length by means of automatic inching. With
- thread cutter and spray guard Compact and ergonomic design
- With accelerator trigger switch and continuous operation function



14" FLEX



Order No. 531277

1x GLT 35 18-EC

Promotion No. 05 1.94000



Does what it promises

18 V cordless vacuum lifter VLP 18 Grabo

18V Battery voltage	LI-ION Lithium-ion technology	Liluminated display	Auto-Mode min./max. Vacuum	Jit max. 130 kg	0,8 Bar 80 kPa max. Vacuum
Jit Stone	Jtt Drywall	Jtt	Jtt Glass	Jtt Tiles	Carrying bag

- The ergonomically-designed, portable electric vacuum lifter lifts and moves almost any object and puts it effortlessly into place. This vacuum lifter is ideal for various materials such as tiles, drywall panels, concrete blocks, glass, metals, furniture and large electrical appliances.
- Its powerful functionality ensures that heavy objects are handled both efficiently and reliably.
- The vacuum lifter has a holding force of up to 170 kg and sucks on almost any surface, even dusty, rough or semi-porous materials.
- Work safety has the highest priority. The vacuum lifter has an automatic suction function and the digital display continuously provides information about the current negative pressure
- With a powerful vacuum pump, stops automatically at maximum vacuum
- The electronic management system (EMS) protects the tool, extends its service life and increases efficiency

TECHNICAL DATA VLP 18 GRABO

Rated air flow	20 l/min
Max. vacuum	0.8 bar
Max. load-bearing capacity	130 kg
Max. holding force	170 kg
Working temperature	0°C ~ 60 °C
Dimensions L x W x H	300 x 184 x 121 mm
Battery voltage	18.0 V
Battery capacity	2.5 / 5.0 / 8.0 Ah
Weight without battery pack	1.48 kg

Order No. 531330

1x VLP 18 Grabo

1x protective bag







The VLP 18 GRABO has a digital display that shows the maximum liftable weight in pounds or kg.



The VLP 18 Grabo has four metal anchor points for external attachment and additional lifting options.



18 V cordless metal shears SHE 16 18-EC



- Brushless motor
- Speed preselection in 4 steps, CDC constant electronics, soft start, overload protection, restart lock, temperature monitoring
- Anti-kickback, switches off the motor if the tool gets jammed
- Maximum curve mobility and convenient cutting of tight radii from 15 mm
- Burr-free cutting of metal sheets and blade spacing flexibly adjustable to different sheet thicknesses
- Extremely streamlined handle section with soft-grip inlays
- Maximum work safety thanks to large hand guard
- 4 HSS reversible blades: The blades are reversible and can be used 4 times

TECHNICAL DATA SHE 16 18-EC

Stroke rate at no-load	950 - 2050 rpm
Max. metal sheet thickness, steel 400 N/mm ²	1.6 millimetres
Max. metal sheet thickness, steel 600 N/mm ²	1.2 mm
Max. metal sheet thickness, steel/ stainless steel 800 N/mm ²	1.0 mm
Max. metal sheet thickness, aluminium 250 N/mm ²	2.0 mm
Smallest radius	16 mm
Min. starting hole diameter	27 mm
Diameter of smallest cuttable hole	50 mm
Working speed	5-9 m/min
Battery voltage	18.0V
Battery capacity	2.5 / 5.0 / 8.0 Ah
Weight without battery pack	1.5 kg

18 V cordless nibbler KNE 16 18-EC



- Brushless motor
- Speed preselection in 4 steps, CDC constant electronics, soft start, overload protection, restart lock, temperature monitoring
- Anti-kickback switches off the motor if the tool gets jammed
- Good curve mobility for notches and internal cut-outs from radii of 40 mm or more
- Quick, tool-free adjustment of the cutting direction up to 360° in 45° increments
- Extremely streamlined handle section with soft-grip inlays
- Cutting with no distortion and sparks

TECHNICAL DATA KNE 16 18-EC

1950 - 4250 rpm
1.6 mm
1.0 mm
0.7 mm
2.0 mm
24 mm
22 mm
48 mm
1.5 mm
2.2m/min
18.0V
2.5 / 5.0 / 8.0 Ah
1.5 kg



Promotion No. 06 **5.490**00



Compact orbital sander with speed control OSE 2-70x198-EC



- E-signal switch for simple, safe operation with quick-stop function prevents the backing pad from coasting
- Grinding speed suitable for the material thanks to electronic speed adjustment
- Ideal for sanding filled surfaces on car parts during repair work. For surface sanding the substrate and avoiding unevenness before applying the filler and using a random orbit sander
- Electronics: Speed preselection in 4 steps, tachometer-controlled constant speed, soft start, restart protection
- Velcro backing pad with bevelled pad geometry and multi-hole system for optimum suction, suitable for all commercially available pads
- Lightweight, compact single-hand orbital sander, very ergonomic and low-vibration thanks to special balancing for fatigue-free work that's easy on the joints
- Effective dust extraction thanks to integrated self-extraction for dust-free working with filter cartridge
- Option to connect an external dust extractor with Ø 27 mm, anti-static suction hose SH 27x3.5m AS (445.045)

With extra-large backing pad!

FLEX

Order No. 530632

- 1x OSE 2-70x198-EC
- 1x Velcro backing pad SP 70x198-M

Promotion No. 08 **2.790**⁰⁰

Cordless edge milling cutter and router CER 18-EC



- An edge milling cutter and router combined. Toolless conversion from the edge cutter to the router
- The collet can be used for milling cutters with a shank diameter of up to 8 mm
- With scale zero function, milling depth adjustment via turret stop and infinitely variable milling depth fine adjustment via rotating ring
- The milling table with rubber-coated handles and clamping function enables safe guidance. The Plexiglas base plate always gives the user a clear view of the milling cutter for perfect results
- For a wide range of applications in woodworking, renovation, drywall construction and mould making. Milling of corner joints, joints, curves/contours with templates, re-milling of laminate profiles. Milling solid wood edges, recesses and grooves with templates and guide rings, making templates for production, etc.
- Electronic quick-acting brake
- Connector for external dust extraction Ø 36 mm or step adapter

Also available as a 2.5 Ah kit in L-BOXX®



and as a 5.0 Ah kit including batteries and charger in L-BOXX®

5.490,-(Order No. 531636)

TECHNICAL DATA CER 18-EC

Idling speed	16,000 - 31000 rpm
Collet diameter	8 mm
Milling stroke (depth)	50 mm
Sound pressure level in acc. with EN 60745	78 dB(A)
Vibration in acc. with EN 60745	1.5 m/s ²
Battery voltage	18.0V
Battery capacity	2.5 / 5.0 / 8.0 Ah
Weight without battery pack	1.8 kg



Order No. 531634

- 1x CER 18-EC
- 1x open-end spanner a/f 17
- 1x base plate D-Format CER
- 1x quick-action stop PG CER
- 1x base plate, round SBB CER
- 1x dust extraction guard SG CER
- 1x collet SPZ CER D6.35
- 1x collet SPZ CER D8



Variable speed adjustment (6 settings).



Quick and easy cutter change thanks to integrated spindle lock.



An edge milling cutter and router combined. Toolless conversion from the edge cutter to the router.



Promotion No. 09

2.24000

Integrated LED lamp for optimum illumination of the work area.



Promotions are valid until 31 August 2024 Only while stocks last

Cordless band saw SBE 64 18-EC



- A perfectly balanced band saw thanks to its design, supported by optimum weight distribution of the battery and motor.
- The SBE is particularly suitable for spark-free cutting of metal in environments where there is a risk of fire
- Brushless motor with greater efficiency and a longer service life
- Adjustable belt speed for perfect cuts in a variety of materials
- Toolless saw blade changing
- Integrated LED lamp for optimum illumination of the work area.
- Ergonomically designed, non-slip rubber-coated handle
- With metal bracket for flexible attachment
 The electronic management system (EMS) protects the tool, extends its service life and increases efficiency





Tool-free saw blade change, with an additional saw blade cover providing increased safety during use.

Adjustable blade speed for perfect cuts in a variety of materials.

Cordless band saw SBE 127 18-EC



- A perfectly balanced band saw thanks to its design, supported by optimum weight distribution of the battery and motor.
- The SBE is particularly suitable for spark-free cutting of metal in environments where there is a risk of fire
- Brushless motor with greater efficiency and a longer service life
- Adjustable blade speed for perfect cuts in a variety of materials
- Tool-free saw blade change, with an additional saw blade cover providing increased safety during use
- Integrated LED lamp for optimum illumination of the work area.
- Ergonomically designed, non-slip rubber-coated handle
- With metal bracket, non-slip for flexible attachment
- The electronic management system (EMS) protects the tool, extends its service life and increases efficiency





Order No. 531748

- 1x SBE 64 18-EC
- 1x bimetallic saw blade
- Carrying case TK-L 238

Promotion No. 10 **2.590**00



Order No. 531749

- 1x SBE 127 18-EC
- 1x bimetallic saw blade
- 1x carrying case

Promotion No. 11 **4.190**00





FLEX STACK PACK[™] Vorkshop

Everything ready to go, everything to hand: The FLEX STACK PACK[™] is the mobile workshop in trolley form, offering you many individual configuration options. The toolbox of today.







8

The all-round package for all jobs

TK-L SP KIT 1

STACK PACK™ value kit consisting of

- Roller Box TK-L SP RB
- Medium Box TK-L SP BO
- Big Organizer TK-L SP BO

Order No. 531461

Promotion No. 12 **3.190**00



Small Organizer TK-L SP SO **Big Organizer TK-L SP BO Top Box TK-L SP TB** 11 kg loading capacity Order No. 531468 Order No. 531467 50 kg loading capacity 22 kg loading capacity Order No. 531466 Clear, transparent Incl. eight accessory Incl. four accessory containers with particontainers with particover Promotion No. 13 **Promotion No. 14 Promotion No. 15** Incl. four accessory tions tions **690**00 **390**00 **79()**00 containers with partitions Roller box TK-L SP RB Medium Box TK-L SP BO Cable wrap TKH KW 63 kg loading capacity Order No. 531465 Robust tyres Ø 23 cm Order No. 531464 Order No. 531472 Incl. removable acces-110 kg loading capacity Universal hook **Promotion No. 16** sory container **Promotion No. 17** Promotion No. 18 Metal-reinforced fold-Removable handle .05000 Incl. removable accesso- 1,89000 ing handle **90**00 Gas pressure springs ry container Gas pressure springs Spirit level holder TKH ADL Order No. 531469 Promotion No. 25 25-piece bit kits 41-part bit kit DB 41 9000 🚹 DB Bulk PH2 Order No. see left Order No. 530494 Variable content Order No. 530489 set-up Promotion No. Promotion No. 20 ■ FLEX STACK PACK[™] **Promotion No. 19** 20-24 stackable inside and 🔿 DB Bulk T20 **450**⁰⁰ 10500 on top of each other Order No. 530490 Easy opening with a Promotion No. 21 Tool holder rails Side TKH WS button DB Bulk T25 Fixed locking of the stacking Order No. 530491 Promotion No. 22 function Order No. 531471 DB Bulk T30 Order No. 530492 **Promotion No. 26** Empty box also Promotion No. 23 available (Order 0000 DB Bulk T40 No. 530535).

Order No. 530493 Promotion No. 24

> Promotions are valid until 31 August 2024 Only while stocks last

9

With XLITHIUM POWER PLUS

THERMA-TECH"

POWER

18V

8.0Ah

18 V battery pack with 8.0 Ah. Additional performance and longer run times for more profomance.

6



The higher energy density of 8.0 Ah battery allows up to 75% more power for selected products.*

Power

🕀 Run time

The modern cell technology delivers a run time up to 60% longer.*

compared with AP 18.0/5.0 Ah

Cordless compact circular saw with pendulum hood CS 62 18.0-EC
 2-speed cordless hammer drill driver with Turbo mode PD 2G 18.0-EC HD
 Cordless mitre saw SMS 190 18.0-EC

Li-ion battery packs

Integrated charge and discharge protection Protected against dust and splash water Integrated charge indicator. Shows at a glance the charge of the battery cells.



3-year warranty Also applies to battery packs and chargers.

See reverse for details

<u>AP 18.0 V</u>

18V Battery voltage			Contraction of the second
Order No.	445886	445894	521078

 AP 18.0 V
 2.5 Ah
 5.0 Ah
 8.0 Ah

 Price
 776,00
 1.214,00
 2.030,00

P-Kit 55 R

- Charging station 10.8/18.0 volt
 2x battery packs
- 5.0 Ah 18,0 V

Order No.

Price



-

A

40 0 1/

tery pack.

+ Service life

Therma-TechTM technology absorbs the heat generated, ensuring longer battery run times and life cycles. Keep Control manages the

strong power output while protecting the bat-

P 10.8 V		
10.8 Battery voltage		Contraction of the second
rdor No	1190/9	120657

Order No.	418048	439657
AP 10.8 V	2.5 Ah	4.0 Ah
Price	602,00	725,00

P-Kit 22 Q

Order No.

Price

Charging station 18.0 volt
2x battery packs 2.5 Ah 18,0 V

on ks	
	491357
	1.590,00

491349

2.550,00

Cordless technology

ttery voltage

The patented Proformance battery system delivers what it promises!

Long run time, long service life, long maximum performance. Only from FLEX With the patented cooling system, FLEX delivers optimum protection of the tool and the battery cells. The battery management system controls the permanent data exchange between the tool, battery and charger so that all parameters are optimally set. This ensures power when the battery and tool are working together, and allows use without energy loss.



Keep Control

The smart technology controls and monitors the tool activity and the charging process, and provides information on the charging status via the LCD display.



Therma-Tech"

The unique, integrated cooling system ensures constant temperatures even under heavy loads.



Power battery

Powerful Li-Ion cells provide 18 V power.




Lithium-ion

No self-discharge. No memory effect.



EC motor

Low-wear and brushless motor with EC technology for greater running performance, more power and more life

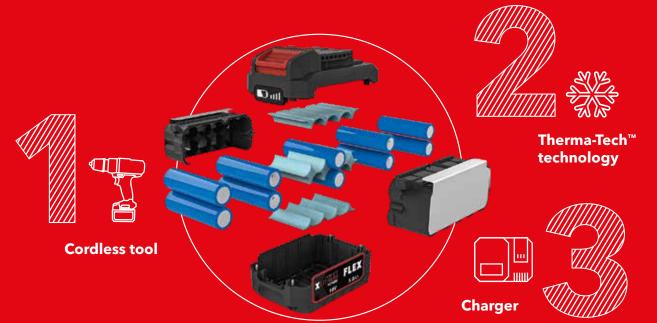

Charger CA 10.8

- for 10.8 V battery packs
- Integrated battery pack cooling, overheating, discharge and overload protection
 With LED charge indicator



418021

Charger CA 10.8 / 18.0

- for 10.8 V and 18.0 V battery packs
- Integrated battery pack cooling, overheating, discharge and overload protection
- LCD display

Chim

Charging times, 18.0 V batteries Order No.

- 40 min for 2.5 Ah battery pack Price
- 50 min for 5.0 Ah battery pack



417882

725,00



The large-format LCD display with a charge time and charge indicator shows the remaining charge time.

- Charging times, 10.8 V batteries Order No.
- 40 min for 2.5 Ah battery pack Price
- 50 min for 4.0 Ah battery pack



The features of the machines correspond to the usual basic features. Subject to technical modifications, price changes and errors. All prices are recommended prices plus VAT.

Now even more choice!

Select your 3 new 18 volt units from the wide FLEX cordless range and make savings not just on the tools: Each FLEX PACK includes three battery packs, a charger and a bag for free. So take what you want. The choice is yours!



The FLEXPACK contains:

Rechargeable battery kit

3x Li-ion battery packs AP 18.0/5.0 Ah 1x rapid charger CA 10.8/18.0 Bag 1x pra

1x practical carrying bag made of plastic-reinforced, tear-resistant fabric material

FLEX

5.60000

Even cheaper thanks to the FLEX Power promotion!

When ordering, please state the following FLEXPACK order number in addition to the listed unit order numbers.

497444

The features of the machines correspond to the usual basic features. Subject to technical modifications, price changes and errors. All prices are recommended prices plus VAT.

3 units of your choice

You can choose more than one of the same tool.





You need them on every construction site.

18 V cordless angle grinder L 125 18.0-EC LD/5.0 kit



- Brushless motor with greater efficiency and a longer service life
- Extremely streamlined handle section with soft-grip inlays
- Microprocessor control with soft start, restart protection after power failure, overload protection
- Electronic Management System (EMS)
- Anti-kickback, switches off the motor if the wheel gets jammed
- Perfect dust protection thanks to removable protective metal grille
- Ergonomic arm working posture thanks to side handle mounted at an angle
- Disc guard adjustable without tools

Also available as a boxed solo machine (Order No. 530497)

Order No. 530496

- 1x L 125 18.0-EC LD
- 1x charger CA 18.0
- 2x battery packs Li-Ion AP 18.0/5.0 Ah
- 1x disc guard for grinding, Ø 125 mm
- 1x clamping flange
- Ix clamping nut
- 1x face spanner
- 1x side handle M10
- Ix carrying case

2-speed cordless drill driver DD 2G 10.8-LDBC/2.5



- Small, handy unit for light screwing and drilling work in a handy carrying case
- The electronic management system (EMS) protects the tool, extends its service life and increases efficiency
- LED cordless capacity indicator

34 Nm

Handy

- Narrow handle
- Very light

Order No. 516155

- 1x DD 2G 10.8-LD
- 1x charger CA 10.8
- 2x battery packs Li-Ion AP 10.8/2.5 Ah
- 1x belt clip
- 1x bit storage
- 1x carrying case

Promotion No. 31





Promotion No. 30 **2,990**00

18 V cordless combination rotary hammer drill FHE 1-16 18.0-EC TC 2.5/kit



- Weighing just 1.37 kg, it's the lightest and most powerful 18 V cordless rotary hammer drill in its class
- Brushless motor with greater efficiency and a longer service life
- Function switch with two functions: drilling, hammer drilling,
- Electronic Management System (EMS)
- With accelerator trigger switch and continuous operation function
- Electronic quick-acting brake
- Decoupled ergonomic handle.
- Vibration-dampened, reduces vibrations

Also available as a boxed solo machine (Order No. 531311)

Order No. 531312

- 1x FHE 1-16 18.0-EC
- 1x charger CA 18.0
- 2x battery packs Li-Ion AP 18.0/2.5 Ah
- 1x carrying case

Promotion No. 32 2.79000



Essentials

65 Nm

65 Nm

2-speed cordless drill driver DD 2G 18.0-EC LD/2.5 kit



- Compact and efficient cordless screwdriver with extremely short head
- Electronic Management System (EMS)
 Bruchlass master
- Brushless motor
- Accelerator trigger switch with switch-on lock
- Keyless chuck with Auto-Lock function
- Metal quick-clamp chuck with thrust ring and auto-lock function
- Electronic quick-acting brake
 Clealwing (surthals)
- Clockwise/anti-clockwise rotation with safety catch
- Integrated LED light with afterglow function



Order No. 519049

- 1x DD 2G 18.0-EC LD
- 1x charger CA 18.0
- 2x battery packs Li-lon AP 18.0/2.5 Ah
- 1x belt clip
- 1x bit storage
- 1x carrying case

Promotion No. 33 **2.090**⁰⁰ incl. VAT € 236.81

2-speed cordless hammer drill driver PD 2G 18.0-EC LD/2.5 kit



- Compact and efficient cordless screwdriver with extremely short head
- Electronic Management System (EMS)
- Brushless motor
- Accelerator trigger switch with switch-on lock
- Keyless chuck with Auto-Lock function
- Metal quick-clamp chuck with thrust ring and auto-lock function
- Electronic quick-acting brake
- Clockwise/anti-clockwise rotation with safety catch
- Integrated LED light with afterglow function

Order No. 519057

- 1x PD 2G 18.0-EC LD
- 1x charger CA 18.0
- 2x battery packs Li-lon
- AP 18.0/2.5 Ah
- 1x belt clip
- 1x bit storage
- 1x carrying case

Promotion No. 34 **2.190**⁰⁰



2-speed cordless hammer drill driver PD 2G 18.0-EC FS55BC/5.0



- Bit holder and 13 mm keyless chuck achieve extremely high flexibility in use
- EC technology ensures a long service life without changing the carbon brushes
- With 75 Nm, the PD 2G 18.0-EC FS55 has sufficient power for many applications



- 1x PD 2G 18.0-EC FS55
- 1x charger CA 18.0
 2x better reached is lease
- 2x battery packs Li-Ion AP 18.0/5.0 Ah
- AP 18.0/5.
 1x handle
- 1x handle
 1x belt clip
- Ix beit clip
 1x bit store
- 1x bit storage1x carrying case
- TX carrying case

Promotion No. 35 **2.780**00



Speeding up interio construction



Order No. 505943

- 1x DW 45 18.0-EC
- 1x bit holder UH-M 50 E6,3-C6,3
- 1x depth stop 1x bit storage
- 1x belt clip

INCLUDING DB Bulk PH2 bit set

(25 bits)



INCLUDING

1x charging station 18.0 V 2x battery packs 2.5 Ah



Promotion No. 36

2.89000

M-DW 55

Screw magazine attachment



1x screw magazine attachment M-DW 55

18V#



Promotion No. 37 1.42000

The features of the machines correspond to the usual basic features. Subject to technical modifications, price changes and errors All prices are recommended prices plus VAT.

Cordless multitool with Starlock MAX holder MT 18.0-EC



STARLOCK PLUS

- Oscillation angle of 2° on both sides
 With StarlockMAX tool holder
- Brushless motor
- Anti-vibration damping elements
- Tool-free tool change
- Integrated double LED lamp



- 1x MT 18.0-EC
- 1x L-BOXX[®] 136





FLEX


Also available as a boxed solo machine (Order No. 518409) and as complete kit including 5.0 Ah batteries and charger in an L-BOXX® (Order No. 518417).

Available as accessories: Depth and parallel stop DS MT 18.0. (Order No. 519804).

10

Matching accessory kits

Kit SM BI-KIT VE3 for wood and metal



Order No. 531055


- 1x BIM wood +metal plunge-cut saw blade, 32 x 50 mm
 1x BIM wood
- +metal plunge-cut saw blade, 65 x 40 mm
- 1X BIM hardwood plunge-cut saw blade, 32 x 50 mm

Promotion No. 39

SM/RM KIT VE3 kit for tiles

Order No. 531056

- 1x carbide technology thin-ground segmented blade, 85 mm
- 1X BIM metal plunge-cut saw blade, 32 x 50 mm
- 1x carbide technology Delta blade, 78 mm



Promotion No. 40 **590**⁰⁰

18 V cordless work lamp WL 1000 18.0



- The LED lamp head can be swivelled through 180°+ 270°.
- LED light with 8 LED and 3 brightness levels
- Firm hold thanks to powerful integrated magnets.
- With metal handle for carrying the lamp
- Ergonomic grip surfaces with SoftGrip
- Luminous flux 200 / 500 / 1000 lm
- Colour temperature 4000 CCT



- Order No. 530610
- 1x WL 1000 18.0
- Ix belt clip

Promotion No. 41 89000

LED cordless building site spotlight with tripod TL 4000 18.0/230



- Powerful cordless building site spotlight with 3 brightness levels of 1000, 2000 and 4000 lumens
- The multifunctional head can be operated as a pure work light directly with an 18 V battery. Can be used fixed with a hook or mounted on a tripod
- Variable-height working range of 1.1-2.2 m with tripod
- The tripod has a 1/4" connection
- Lamp can be turned through 180°
- Multifunction control panel with LED charge level indicator, activation button, On/Off switch and USB-C charging port
- Fast set-up and stability thanks to one-button operation and tripod stand
- The building site spotlight can also be supplied with power directly via a commercially available cold appliance connection cable (not included!)
- Suitable for operation with 230 V or 110/120 V

Order No. 530375

1x TL 4000 18.0/230

















LED cordless building site spotlights CL 5000 10.8/18.0 and CL 10000 10.8/18.0



Promotions are valid until 31 August 2024 Only while stocks last

20



Proformance with price advantage

The sanding all-rounder for refurbishment work. A unique compact design, effective dust extraction and handy - FLEX palm sanders with speed control are now available at an attractive introductory price.

Random orbit sander ORE 3-150-EC and ORE 5-150 EC



- Brushless motor
- Adjustable speed
- Effective dust extraction
- With disc brake
- Impact-resistant filter cartridge with replaceable PES filter
- Dust extraction connection Ø 27 mm
- Hook and loop sanding disc with multi-hole system for optimum suction, suitable for all commercially available pads Ø 150 mm



- 1x ORE 3-150 EC
- 1x medium hook & loop backing pad
- 1x PES microfilter cartridge with filter
- 1x FES micromiter carmage with 1
 1x Allen key, WAF 5

Promotion No. 45



Order No. 532021

- 1x ORE 5-150 EC
- 1x medium hook & loop backing pad
- 1x PES microfilter cartridge with filter
- 1x Allen key, WAF 5

Promotion No. 46

3.35000

Delta sander ODE 2-100 EC Random orbit sander ORE 2-125 EC Orbital sander OSE 2-80 EC



- Low-vibration
- Brushless motor
- Electronic speed control with 4 settings
- Ergonomically designed, handy grip cap with Soft-Grip inlay
- Effective dust extraction thanks to integrated self-extraction with filter cartridge

Order No. 532017

- 1x ODE 2-100 EC
- 1x hook & loop backing pad
- 1x PES microfilter cartridge with filter

Promotion No. 47



- Order No. 532018
- 1x ORE 2-125 EC
- 1x hook & loop backing pad
 1x PES microfilter cartridge
- with filter

Promotion No. 48 **2.540**⁰⁰

Order No. 532019

- 1x OSE 2-80 EC
- 1x hook & loop backing pad
 1x PES microfilter cartridge with filter

Promotion No. 49





Rotary hammer drill CHE 5-40 SDS-max



- 1150 Watt hammer drill and chisel hammer in D-build with • high impact energy and low vibrations
- Function switch with three functions: Hammer drilling, chisel-ling, chisel adjustment
- Rotation stop for chiselling
- Ideally suited for hammer drilling, diameter 40 mm in ma-. sonry and concrete for composite, injection anchor fixings and through holes.
- For chiselling work to remove plaster and tiles
- Variable speed, continuously adjustable from 1-6 with "Pow-er Control" LED display
- Safety slip clutch: protects in the event of a jammed drill bit .
- Decoupled, ergonomic handle with rubberised grip surface. Vibrations are reduced by a sprung damper and additional vibration damping between the housing and handle



Vibrations are reduced by a sprung damper and additional vibration damping between the housing and handle.



Function switch with three functions: Hammer drilling, chiselling, chisel adjustment.



- 1x CHE 5-40 SDS-max .
- 1x handle
- Ix tube of grease
- 1x carrying case



Promotion No. 50 5.66000



Chiselling hammer DH 5 SDS-max



- Vibration-dampened rear handle .
- Side handle with radial and axial rotation
- Powerful 1,050 watts .
- Blows per minute 3,500 rpm
- 12 chisel settings
- Max. individual impact energy (in acc. with EPTA) 6.7 J
- Weight 5.4 kg

Order No. 532027

- 1x DH 5 SDS-max
- 1x handle
- 1x tube of grease
- 1x carrying case



Promotion No. 51 5.360⁰⁰

Universal rotary hammer drill CHE 2-28 SDS-plus



- Light 800 watt pistol-shaped rotary hammer and drill chisel hammer
- Max. individual impact energy (in acc. with EPTA) 2.7 J Clockwise/anti-clockwise rotation with switchover via carbon
- brush reverser. As a result, almost identical torque in both directions of rotation
- Drilling with hammer function
- Drilling depth stop: for precise working
- Rotation stop for chiselling
- Max. drilling range up to 28 mm in concrete
- With accelerator trigger switch and continuous operation function
- Ideal for drilling/hammer drilling, 4-18 mm diameter in masonry and concrete for composite, anchor attachment and clearance holes and for light chiselling work to remove plaster and tiles

Order No. 532028

- 1x CHE 2-28 SDS-plus
- 1x handle
- 1x drilling depth stop

INCLUDING

- 1x L-BOXX® 136
 - Drilling dust adapter SAD BS D32



Giraffe® GE 7

- + Segmented sanding head MH-R D225 Order No. 532858
- + Handy-Giraffe® GCE 6-EC



1x Giraffe® GE 7

- 1x Handy Giraffe® GCE 6-EC
- 1x segmented sanding head
- with rotatable edge segment MH-R D225
- 1x clip quick-action clamping ring SH-FC 32
- 1x carrying bag



- Handy, light machine with optimum operating comfort.
- Low-fatigue and ergonomic working Innovative head change system. Grinding heads can be
- attached and removed with one click. Segmented grinding head for working on surface transitions from wall to wall and wall to ceiling.

GCE 6-EC

- For smoothing plasterboard panels or upgraded insulation Styrofoam panels and for painting preparation
- Lightweight and handy for use on smaller areas, difficult to reach places
- Innovative head change system. Grinding heads can be attached and removed with one click.

Giraffe[®] GE 5 ECO



- Easy handling thanks to optimised balance between motor and grinding head
- Reliable power transmission, great flexibility thanks to the flexible drive shaft.

Order No. 474835

Promotion No. 53

10.59000

- 1x Giraffe® GE 5 boxed
- 1x clip adapter SAD-C D36/27 AS/NL





Mobile workstation for wall and ceiling sanding systems GM 270

- Mobile workstation for mounting the Giraffe[®] types GE 5 / 7 and GDE 10, allowing sustained work performance without influencing the machine weight
- Reduced fatigue and strain significantly save the user's strength!
- Tool-free and quick Giraffe® changing thanks to clamping into a sturdy tool holder, and tool-free working height adjustment
- Optimum contact pressure on the grinding surface thanks to gas pressure spring
- Compact and handy, fits in any vehicle
- The Mobile Giraffe is ready for use quickly, and can be assembled without tools thanks to quick-action elements. The base plate can be fixed on the VCE 33/44 vacuum cleaners with an L-BOXX® attachment. Just secure the lifting rod to the folding system and clamp the Giraffe in place
- Max. working height 2.7 m
- Weight 8.0 kg

Order No. 530596

- 1x GM 270
- 1x carrying bag
- 1x L-BOXX® 136 carrying case





Compact and handy, fits in any vehicle.



Tool-free and quick Giraffe® changing thanks to clamping into a sturdy tool holder.

Promotion No. 55 49000



You'll find the right industrial vacuum cleaner on Pages 26/27.

The features of the machines correspond to the usual basic features. Subject to technical modifications, price changes and error All prices are recommended prices plus VAT

Renovation · **Giraffe**[®]



Accessories

Sanding disc, 225 mm diameter

Product	Type/grit	Order No.	Price plus VAT
	P 40	280739	949,00
	P 60	260233	949,00
	P 80	260234	949,00
hook and loop	P 100	260235	908,00
sandpaper Xtreme Plus quality	P 120	282405	908,00
	P 150	311995	908,00
	P 180	311987	908,00
	P 220	260236	908,00
	P 24	531542	550,00
A CONTRACT OF	P 40	531900	249,00
NEW	P 60	531901	245,00
	P 80	531902	245,00
Sandpaper, wall/ceiling	P 100	531896	229,00
	P 120	531897	229,00
	P 150	531898	229,00
	P 180	531543	229,00
	P 220	531899	229,00
	P 40	531908	395,00
NEW	P 60	531909	395,00
	P 80	531544	395,00
	P 100	531903	379,00
Sandpaper, extra-fine	P 120	531904	379,00
	P 150	531905	379,00
	P 180	531906	379,00
	P 220	531907	379,00
Hook and loop perfo-	K 80	260237	990,00
rated sanding paper	К 100	260230	990,00
Hook and loop sand-	A 100	281042	745,00
ing pad	A 180	281034	745,00

	Padded adapter for GE 5, GE 5 R, GSE 5 R	KAD D225/16 S	483109	225,00
		KAD D225/16 H	483117	270,00
	Cushioned adapter for round sanding head of the Vario Giraffe [®] and Handy Giraffe [®]	KAD D225/13 S	437956	225,00
		KAD D225/13 H	483095	280,00
0	Hook and loop back- ing pad kit, round	super soft	483486	531,00

Sanding discs & backing pads

Interchangeable heads GE 7 / GCE 6-EC / GE MH 18.0-EC

Segmented sanding head with rotatable edge segment	MH-R	457183	2.377,00
Random orbit sanding head	MH-X	457205	2.703,00
Round sanding head	MH-O	457175	2.153,00
Triangular sanding head	MH-T	457191	2.377,00

Giraffe[®] holder for VCE 33 ... / VCE 44 ...

	Giraffe® holder	VCE-GE Fix	445185	276,00
--	-----------------	------------	--------	--------

Sanding pad, length 290 mm

		P 40	531948	395,00
NEW		P 60	531949	395,00
		P 80	531915	395,00
		P 100	531910	379,00
	Sandpaper, extra-fine	P 120	531911	395,00
		P 150	531912	379,00
		P 180	531913	379,00
		P 220	531914	379,00

L Class vacuum cleaner

Safety vacuum cleaner with manual filter cleaning VC 6 L MC



Safety vacuum cleaner with manual filter cleaning VC 21 L MC

1x VC 21 L MC incl. accessories

• 5x fleece filter bags FS-F VC/E 21-26 L VE5

1x extensive cleaning kit

Order No. 409979



Safety vacuum cleaner with automatic filter cleaning, S 44 L

1x suction hose with auxiliary air control

Order No. 444146

1X PES flat-fold filter

2x extension pipes

Ix disposal bag

1x S 44 L



Order No. 532024

- 1x VC 6 L MC
- 1x suction hose 32 mm Ø x 0.5-2.5 m
- 1x flat-fold filter, Class L
- 1x fleece filter bag, Class L
- . 1x hand pipe
- 1x crevice nozzle



Safety vacuum cleaner with automatic filter cleaning VCE 33 LAC and VCE 44 LAC



- High-performance turbine for high suction power and high negative pressure
- Permanent socket with electronic automatic On/Off
- Flow rate control via rotary switch
- Electronic fill level monitoring during wet suction
- Start-up and switch-off delay
- 15 seconds coasting empties remaining dust in the suction hose
- Dust-protected anti-static features
- Easy filter changing
- Adapter plate for fixing L-BOXXes and Tanos Systainers



VCE 33 L AC, Order No. 471186

- 1x VCE 33 L AC
- 1x anti-static suction hose Ø 32 mm x 4 m
- 1x L-BOXX[®] holder
- 1x flat-fold filter PES L/M/H
- 1x fleece filter bag Class L/M
- 1x PP disposal bag
- 1x adapter Ø 25-32 mm, anti-static 2x hose holder
- 5x fleece filter bags FS-F VCE L/M
- 1x carrying case L-BOXX® TK-L 102
- 1x extensive cleaning kit



VCE 44 L AC, Order No. 471208

- 1x VCE 44 L AC
- Equipment as above

Promotion No. 60 7.09000

Promotion No. 59

6.98000

M class vacuum cleaner

20L

1200 W

HIMAH

For the automotive sector

7,5 m

20 I safety vacuum cleaner with manual filter cleaning, Class M VCE 22 M MC and VCE 22 M MC V

- The high-performance turbine ensures high suction power
- With equipment socket and automatic electronic on/off switch
- With soft start and switch-off delay (5 seconds coasting)
- Selector switch suction diameter of 32 mm or 21 mm
 With flow rate control via the rotary switch
- With now rate control via the rotary switt
 Dust areated anti-static features
- Dust-protected anti-static features
- Safety vacuum cleaner class M, suitable for all dusts with TLV values > 0.1 mg/m³. Specially for mineral dusts and wood dusts (including beech and oak)
- Flow sensor technology monitors the flow rate

For construction site use



- Order No. 519812
- 1x VCE 22 M MC
- 1x anti-static suction hose with auxiliary air control
- 1 cleaning kit







Order No. 530920

1x VCE 22 M MC V

1x anti-static suction hose

Promotion No. 62 **5.490**00

in the second

FLEX

Safety vacuum cleaner with automatic filter cleaning VCE 33 M AC and VCE 44 M AC



- High-performance turbine for high suction power and high negative pressure
- Permanent socket with electronic automatic On/Off
- Flow rate control via rotary switch
- Electronic fill level monitoring during wet suction
- Start-up and switch-off delay
- 15 seconds coasting empties remaining dust in the suction hose
- Dust-protected anti-static features
- Easy filter changing
- Adapter plate for fixing L-BOXXes and Tanos Systainers



VCE 33 M AC, Order No. 471194

- 1x VCE 33 L AC
- 1x anti-static suction hose Ø 32 mm x 4 m
- 1x L-BOXX[®] holder
- 1x flat-fold filter PES L/M/H
- 1x fleece filter bag Class L/M
- 1x PP disposal bag
- 1x adapter Ø 25-32 mm, anti-static
- 2x hose holders
- 5x fleece filter bags FS-F VCE L/M
- 1x carrying case L-BOXX® TK-L 102
- 1x extensive cleaning kit



VCE 44 M AC, Order No. 471216

- 1x VCE 44 M AC
- Equipment as above

Promotion No. 64 9.45000



Promotion No. 63

Clean job

Maximum dust protection **on the construction site** VAC 800-EC air cleaner for construction sites

Watch the video!



Very efficient

Significantly reduces the pollutant load in rooms up to 100 sq. m within a short time.

Verv handv

No installation required. Set up, switch on - clean air. The filter is changed without the need for tools.

Low incidental costs

When used properly, the HEPA 14 filter can be used for up to one year. The VAC 800-EC air cleaner is specially designed for continuous operation and impresses with its very low power consumption.

Whisper mode

In special Night mode, the sound pressure level is only 38 dB (A). This means that the operating noise falls below the concentration disturbance threshold and is therefore also ideally suited to places such as classrooms.

Light weight

Weighing just 7.2 kg, the VAC 800-EC is the quietest in its class, and this makes it easy to move.

Robust construction

Specially designed for extreme conditions on construction sites. The VAC 800-EC is particularly robust, and boasts an impressive long service life.



Order No. 532859

- 1x VAC 800-EC
- 1x HEPA filter H14
- 1x pre-filter mat G3
- 1x coarse filter G4
- 1x hose SH 125x5m C











EC Whisper Turbine ("Made in Germany")

- Long run time Long service life

 - Low noise



Tool-free "Top-Change" filter change Thanks to simple operation of the quick-action clamping lever. Prevents unnecessary contact with spent filter cartridges.





Work with negative pressure in the working area A sluice should be installed to prevent dust from migrating into the environment outside the work area. The cleaned air is discharged from the working area via a hose or is fed back into the working area as cleaned air.

The mobile FLEX Air Cleaner can be put to use immediately and without the need to assemble anything

- Power consumption 170 watts •
- Rated power consumption 1.7 1.45 A •
- No-load speed 0-3930 /min
- Dust extraction connection Ø 125 mm Sound pressure level 1 m, 58 dB(A) •
- .
- Max. flow rate 544 m³/h .
- Filter surface area H13 > 7.26 m² .
- Fuse 10 VA .
- Dimensions (L x W x H) 373 x 400 x 508 mm Cable length 3.5 m •
- •
- Weight 7.2 kg

Product	Designation		Qty.	Order No.	
	SH 125 x 5 m C		1	477672	
Hoses	SH 125x6m C		1	488186	
	SH 205x7.5m C		1	500399	
Filter	Pre-filter mats G3	VFE VAC G3	10	477699	
	Coarse filter G4	FE VAC G4	1	477702	
	Activated carbon filter G4	FE VAC G4 AK	1	477710	
	Fine dust filter F7	FE VAC F7	1	477729	
	HEPA 13 filter	FE VAC H13/HEPA	1	477737	
	HEPA 14 filter	FE VAC H14/HEPA	1	488194	

1150-watt wet stone polisher LE 12-3 100 WET, PRCD with variable speed and PRCD switch, 115 mm



- Powerful 1150 watt motor
- Microprocessor electronics: with tachometer-generator constant speed control, soft start, overload protection and speed preselection
- GFCI operator protection circuit breaker integrated into the cable
- High torque for maximum removal performance and the best surface quality
- The water supply and control is located under the housing, making it easy to operate and ensure precise dosing.
 A free grip area is created directly above the polishing pad
- 2 m special hose: requires no additional hose securing.
- Quick-action brass coupling: for 1/2 water hose
- Spindle lock

Bushhammer for stairs LST 1503 VR



- Microprocessor electronics: with speed preselection and consistent speed control, soft start, overload protection.
- Working width adjustable: 3 stages from approx. 40 mm up to approx. 92 mm
- Stop: steplessly adjustable for precise working along the edge of the stone
- Dust extraction: for use even in occupied buildings
- The machine's 60 aggressive carbide tips take care of the job quickly precisely
- The rotating tool head is mounted in rubber, reducing noise and vibrations and increasing the drive's service life
- Grip hood directly above the tool allows the machine to be precisely guided



- Order No. 259229
- 1x LST 1503 VR
- 1x stop, complete
- 1x Allen key, WAF 5
- 1x SAD D32 WS/WSK
- 1x SHV-C 32x0.5m

-

Promotion No. 67

The alternative to the small cutting bench Diamond cutting wheel for stone CS 60 WET



- High-performance motor: extra-powerful, for cutting stone and milling joints
- Stepless cutting depth adjustment from 0-60 mm, with guide rail up to 54 mm. In a 0-44 mm mitre cut, with guide rail up to 38 mm
- Stepless angle adjustment for mitre cuts from 0-45°
- Cutting marking of 0°/30°/45° on the guide table for guick orientation
- High-quality disc guard and die-cast magnesium guide plate
- Rubber motor guard prevents splash water from being directly sucked in
- Water supply: for effective cooling of the diamond tool
- Quick-action brass coupling: for 1/2" water hose
- GFCI operator protection circuit breaker integrated into the cable

Order No. 531029

- 1x diamond cutting wheel
- for stone CS 60 WET 1x key for tool
- changing
- 1x parallel stop
- 1x L-BOXX® 238
- 1x diamond cutting wheel
- with segmented cutting edge



Promotion No. 68 9.450⁰⁰

Concrete Giraffe® GDE 10 kit Turbo-Jet / Thermo-Jet



Concrete Giraffe® GDE 10 Kit Turbo-Jet

Order No. 532860

- 1x Concrete Giraffe[®] GDE 10
- 1x grinding head DGH-R D150
- with tool holder D28 mm1x grinding head DSH-R D150
- with hook and loop backing pad D150 mm
- 1x hook & loop diamond sanding pad DP 30 DRY D115
- 1x anti-static suction hose SH-CF 32x4m AS/NL
- 1x diamond backing pad Turbo-Jet D150
- 1x carrying bag

Concrete Giraffe[®] GDE 10 kit Thermo-Jet

Order No. 532861

- 1x Concrete Giraffe[®] GDE 10
- 1x grinding head DGH-R D150
 with to all helder D20 mm
- with tool holder D28 mm
 1x grinding head DSH-R D150 with hook and loop
- backing pad D150 mm1x hook & loop diamond
- sanding pad DP 30 DRY D115 1x anti-static suction hose
- SH-CF 32x4m AS/NL Ix diamond backing pad
- Thermo-Jet D150
- 1x carrying bag



Promotion No. 69 **14.490**00

The grinding hea DGH-R D150 and

The grinding heads DGH-R D150 and DSH-R D150 are included as standard in the scope of delivery





- Powerful feed
- Cutting depth of max. 62 mm

Order No. 513326

- 1x cordless circular saw CS 62 18.0-EC
- 2x battery packs Li-Ion AP 18.0/5.0 Ah
- 1x charger CA 10.8/18.0
- 1x saw blade Z 24-WZ
- 1x dust bag
- 1x suction adapter
- 1x L-BOXX[®] 374 carrying case
- 1x adapter for guide rail
- GR-A CS 62





Flexible adapter for rail system - Tool-free assembly - Cuts of 0°-50° on the FLEX rail - Can be used for other rail systems

INCLUDING GRS 160 guide rail



Compact renovation grinder for sanding up to edges LDE 16-8 125 R, Turbo-Jet II kit

- Electronics with speed stabilisation, soft start, overload protection and temperature monitoring
- Reliable 1600 watt high-power motor
- Steplessly adjustable no-load speed 4500-7800/min
- Anti-kickback, switches off the motor if the wheel gets jammed
- . Disc guard with pivoting segment for sanding up to the wall
- Steplessly-adjustable, vibration-dampened ergonomic handle FLEX clip hose connection for Ø 32 mm snap coupling included
- in the basic package
- Recessed spindle lock to prevent accidental actuation
- Ideally suited to working on walls, ceilings and floors. Efficient and economical thanks due to optimum machine and sanding disc matching



Also available as LD 16-8 125 R, Turbo-Jet II kit with constant speed, (Order No. 504939)

Order No. 513474

- 1x LDE 16-8 125 R 1x diamond backing pad Turbo-Jet II
- 1x dust extraction guard with brush ring
- Ix bail handle
- 3x cable holders
- 1x Allen key, WAF 4
- 1x face spanner

Diamond backing pad Screed-Jet Ø 125 mm

(Backing pad for abrasive materials)

- 1x L-BOXX[®] 238 carrying case
 - INCLUDING



Powerful 2400 watt renovation grinder for surfaces, 180 mm LD 24-6 180, Turbo-Jet kit

- Elastic rubber suction ring with low-wear metal ring
- Dust extraction protects against abrasive dust
- Soft start for a safe start
- Restart protection after a power failure
- Dust extraction guard with continuous height adjustment
- Extraction nozzle 32 mm external Ø
- Very well suited to material removal from large areas
- Sanding plates of heights 22 mm to 28 mm are suitable.
- With steplessly adjustable, vibration-dampened ergonomic handle





Order No. 513482

- 1x LD 24-6 180 1x Turbo-Jet diamond
- grinding disc, Ø 180 mm 1x dust extraction guard
- with rubber suction ring 1x suction adapter
- 1x clamping nut M 14
- 1x clamping flange WAF 17
- 1x Allen key, WAF 6
- 1x face spanner
- 1x bail handle
- 3x cable holders
- 1x carrying case

Promotion No. 79 8.3**90**00

RETECFLEX the universal tool for renovation, refurbishment and modernising RE 16-5 115, pointed scouring head kit

- Universal tool system that can be adapted for many refurbishment and modernisation applications. Compact, handy and perfectly suited to machining smaller areas and the edges of large areas
- Speed preselection, speed stabilisation by means of tachogenerator, soft start, restart interlock after power failure, overload protection and temperature monitoring
- Anti-kickback
- Special gearbox: special gear reduction provides high torque in the medium and lower speed range
- With steplessly adjustable, vibration-dampened ergonomic handle
- FLEX clip system. No adapter and reducing sleeves required
- Dust extraction guard: with stepless height adjustment
- Spindle lock

Order No. 513504

- 1x RE 16-5 115
- 1x pointed scouring head
- 1 dust extraction guard for sanding
- Ø 115 mm brush ring
- 1x base for scouring Ø 80 mm 1x backing pad Ø 115/M14
- hook and loop, bowl 1 corundum Ø 115
- sanding paper kit

- 3x fastening screws, M 8
- 1x L-BOXX[®] 238 carrying case





The features of the machines correspond to the usual basic features. Subject to technical modifications, price changes and error All prices are recommended prices plus VAT.

32

- 1x bail handle
- 1x ring spanner, WAF 13
- 1x Allen key, WAF 4





High precision – line after line

Self-levelling cross-line laser ALC 2/1-G/R

- Individually switchable horizontal and vertical laser line
- Anti-reflection lenses
- Range up to 50 metres/up to 70 metres with receiver
- Self-levelling can be switched off
- Simple operation
- Integrated Li-polymer rechargeable battery

Order No. 530443

- 1x ALC 2/1-G/R .
- 1x magnetic holder
- 1x carrying bag .
- 1x USB cable
- 1x USB charger

INCLUDING Tripod LKS 65-170 F 1/4

Green laserlight





Promotion No. 72 2.59000

Promotion No. 74

6.450⁰⁰

Self-levelling cross-line laser ALC 3/1-G/R



- With one horizontal and two vertical laser lines at a 90° angle plus plumb (red laser), individually switchable.
- Range up to 50 metres/up to 70 metres with receiver
- Anti-reflection lenses
- Battery operating period of over 6 hours

Order No. 530444

- . 1x ALC 3/1-G/R
- 1x magnetic holder
- . 1x carrying bag
- . 1x USB cable
- 1x USB charger





Promotion No. 73 79000

Green laserlight

360° cordless line laser ALC 3/360-G/R 10.8 kit

10.8				±4°			5⁄8 "
Battery voltage	Lithium-ion technology	Laser class	Green laser	Self levelling	IP 54	Lock	Tool fixture

- Receiver mode
- One horizontal and two vertical 360° laser lines,
- individually switchable
- Plumb function
- Anti-reflection lenses
- . Range up to 100 m, with receiver up to 120 m
- Self-levelling function can be switched off
- 3 brightness levels
- . Dust-proof and splash-proof
- Optical warning signal when self-levelling range is exceeded

Order No. 532862

- 1x ALC 3/360-G/R 10.8
- . 1x laser target plate and glasses
- 1x laser universal holder
- 1x charger CA 10.8
- 1x rechargeable battery 2.5 Ah AP 10.8/2.5
- 1x carrying case L-BOXX[®] 136





Safety information! FLEX laser measuring instruments comply with all international safety standards. They comply with laser class 2 or 2M according to DIN EN 60825-1: 2001-11 (wavelength 635-670 nm, output power < 1mW) and do not harm the eyes or skin when used as directed. Nevertheless one should never look directly into the laser beam when using laser measuring devices.

Laser rangefinder ADM 100 G Laser rangefinder ADM 70 G up to max. 100 m



- Green laser for fast and precise measurements
- Length, surface, volume and indirect measurements
- Permanent angle measurement
- Up to 99 values can be stored with the memory function
- Continuous measurement mode
- Unit/sound button: Silent or with tone and setting of the required measuring unit
- Illuminated four-line display
- Housing protected against dust and splash water
- 1/4" connecting thread for tripods
- Operation possible with AAA 1.5 V batteries or a rechargeable battery



ADM 100 G Order No. 518964

- 1x lithium ion battery
- 3x AAA 1.5 V batteries
- 1x USB in micro-USB cable

beam when using laser measuring devices.

All prices are recommended prices plus VAT.

1x protective bag



up to max. 70 m



- Green laser for fast and precise measurements
- Length, surface, volume and indirect measurements
- Permanent angle measurement • Up to 99 values can be stored with the memory function
- Continuous measurement mode
- Unit/sound button: Silent or with tone and setting of the required measuring unit
- Illuminated four-line display
- Housing protected against dust and splash water
- 1/4" connecting thread for tripods

ADM 70 G

Order No. 518956

1x protective bag

Promotion No. 76

1.**622**00

The features of the machines correspond to the usual basic features. Subject to technical modifications, price changes and errors.

1x lithium ion battery

3x AAA 1.5 V batteries


1x USB in micro-USB cable

Safety information! FLEX laser measuring instruments comply with all international safety standards. They comply with laser class 2 or 2M according to DIN EN 60825-1: 2001-11 (wavelength 635-670 nm, output power < 1mW) and do not harm the eyes or skin when used as directed. Nevertheless one should never look directly into the laser

Operation possible with AAA 1.5 V batteries or a rechargeable battery

900





- Rapid determination of dimensions indoors .
- Simple operation
- Length, surface area and volume calculation
- Indirect height measurement
- Continuous measurement mode
- . Units can be switched between m/mm, inch/ feet
- Integrated rechargeable battery .
- Automatic switch-off
- Illuminated display
- . Dust-proof housing

ADM 30 Smart

<u>Order N</u>o. 504599

Ix hand strap

Ix USB cable

Promotion No. 77

Promotions are valid until 31 August 2024

Only while stocks last

35

42()00

1x ADM 30 Smart



Causing a real stir

FLEX professional mixers are causing a stir on the market. Secure an ergonomically optimal solution for clean, powerful and fast mixing on the construction site now. The ideal introductory offer for painters, plasterers or bricklayers.


1010 watt 1-speed mixer MXE 1000

- For mixing applications up to 40 kg
- Full-wave electronics: with soft start, temperature monitoring, overload protection and stepless speed control via the accelerator trigger switch
- No-load speed 0 780/min



- 1x 1-speed mixer MXE 1000
- 1x helical paddle WR2 120x600 M14
- 1x helical paddle WR3R 120x600 M14





1600 watt 2-speed mixer MXE 1602

- For mixing applications up to 90 kg
- Sturdy 2-speed gearbox: large size and optimum gear ratio - for speeds to suit the material and a high torque
- with soft start, temperature monitoring, overload protection and stepless speed control via the accelerator trigger switch
- Comfortable 3-setting switch accessible from the handle position without interrupting work, protected by a rubber grommet

Order No. 531037

- 1x 2-speed mixer MXE 1602
- 1x helical paddle WR2 160x600 M 14
- 1x helical paddle WR3R 160x600 M14







2helical paddles included with every unit

1x WR2 ...x600 M14 1x WR3R ...x600 M14

1200 watt 2-speed mixer MXE 1202

- For mixing applications up to 60 kg
 Full-wave electronic control: with soft start, temperature monitoring, overload protection, and with continuous speed control
- via the accelerator trigger switch
 3-setting switch / Setting 1: Cleaning, Setting 2: Slow stirring, Setting 3: Mixing
- No-load speed, 1st Gear 0 - 210 / 325 / 530/min
- No-load speed, 2nd Gear 0 - 320 / 490 / 780/min

Order No. 531036

- 1x 2-speed mixer MXE 1202
- 1x helical paddle WR2 140x600 M 14
- 1x helical paddle WR3R 140x600 M14

Promotion No. 82 **2.590**00



18 V cordless 2-speed mixer with MXE 18.0-EC 3-setting speed switch



- For mixing applications up to 30 kg
- Electronic Management System
- Accelerator trigger switch
- Robust 2-speed gearbox
- 3-setting switch / Setting 1: Cleaning, Setting 2: Slow stirring, Setting 3: Mixing
- No-load speed, 1st Speed 0 210 / 325 / 530 rpm
- No-load speed, 2nd Speed 0 320 / 490 / 780 rpm

Order No. 532031

- 1x cordless 2-speed cordless mixer MXE 18.0-EC
- 1x charger CA 10.8/18.0
- 2x battery packs Li-Ion AP 18.0/5.0 Ah
- 1x helical paddle WR2 120x600 M14
- 1x helical paddle WR3R 120x600 M14



Promotion No. 84 **5.290**00



2600 watt angle grinder L 26-6 230 TK-S



- Motor: heavy-duty and very efficient for strong grinding performance
- Soft start, restart protection after a power failure, overload protection, CDC constant speed control Anti-kickback
- SoftVib handle reduces vibrations, can be mounted in three positions
- Rear handle with soft insert can be rotated 90° to the clockwise and anti-clockwise for an optimum working posture
- Spindle lock



- 1x L 26-6 230 TK-S
- 1x carrying case
- 1x SDS-Clic quick-release nut M 14
- 1x diamond cutting wheel, standard concrete Ø 230 mm



Dust extraction guard and diamond cutting system DCG L 26-6 230 Kit

- Ready to go straight away, angle grinder with ready-fitted dust extraction guard in the case. Universal diamond cutting wheel 230 mm including
- Powerful angle grinder L 26-6 230 with soft start, restart protection, overload protection, CDC constant electronics, anti-kickback function
- Fully encapsulated dust extraction guard for efficient dust extraction
- Direct connection via Flex Clip system
- Base plate with rollers for easy feed. Can be used with or without guide rail
- Depth stop with scale for presetting the cutting depth and any desired start of cut (plunge cut) with and without guide rail (max. 55 mm with or 60 mm without rail).
- Side handle, can be fitted on either the right or left



- Order No. 494674
- 1x L 26-6 230 angle grinder 1x dust extraction
- guard DCG AG 230 1x diamond cutting wheel,
- universal Ø 230 mm 3x DCG AG kit rubber strip
- 1x DCG AG 230
- spacer ring L26/24/22 1x SoftVib handle
- 1x clamping flange
- 1x clamping nut M 14
- 1x Allen key, WAF 6 1x face spanner BL 5
- 1x guide rail GRS 80

1x carrying case with inlay

Promotion No. 86 5.76300

Promotion No. 87

1.82600

Promotion No. 85 **2.490**⁰⁰

T I I

Ø 230



Detachable dust extraction guard with efficient dust extraction for precise cuts when working with diamond cutting wheels in conjunction with 230 mm angle grinders. Extremely stable, the stabiliser element prevents distortion caused by the side weight of the angle grinder. Base plate with rollers for easy feed, the side handle can be fitted on either the left or right. Incl. suction connection for FLEX clip system and adapter for guide rail. Depth stop with scale for presetting the cutting depth for use with or without a guide rail. Maximum cutting depth 60 mm.

Order No. 471895

1x dust extraction guard DCG AG 230



Original FLEX

800 watt angle grinder L 811 125



FLEX =



- Comprehensive dust protection for motor and gearbox
- Restart protection after a power failure
- Longer service life thanks to optimised cooling and modified carbon brush geometry
- Light, ergonomic design, short and very handy
- Disc guard adjustable without tools

1000 watt angle grinder L 1001 125



Restart protection

Order No. 438340

1x L 1001 125

1x handle

1x disc guard

1x face spanner

Promotion No. 89

81900

125 Ø grinding

1x clamping flange 1x clamping nut M14

- Motor: heavy-duty and very efficient
- for strong grinding performance
- Extremely light and handy
- Compact, streamlined and ergonomic design
- Disc guard adjustable without tools

Order No. 494682

- 1xL811
- 1x disc guard
- 125 Ø grinding Ix handle
- 1x clamping flange 1x clamping nut M 14
- 1x face spanner

Promotion No. 88 57000

1400 watt angle grinder L 1400 125





- Soft start, restart protection after a power failure, temperature monitoring, CDC constant speed control
- Motor: heavy duty with a high level of efficiency
- Longer service life thanks to optimised cooling and carbon brush aeometrv
- Comprehensive dust protection for motor and gearbox
- Ergonomic arm working posture thanks to side handle mounted at an angle
- Tool-free adjustable guard hood with clamping lever
- Lockable slide switch
- Spindle lock

Order No. 492329

- 1x L 1400 125
- 1x disc guard
- 125 Ø grinding
- 1x handle
- 1x clamping flange
- 1x clamping nut M 14
- 1x face spanner

Promotion No. 90 1.15000

2200 watt angle grinder L 2200 230





- Durable motor and gearbox housing. The stable and robust steel gearbox and the spindle bearing protected by a metal cap increase reliability and service life.
- Rear shaft handle with soft padding for secure grip
- Switch with safety catch and lock
- Restart protection after a power failure
- Soft start for a comfortable and smooth start
- Spindle lock
- Tool-free adjustable guard hood with clamping lever Cutting guard (389625) or cutting guard cover (446068) as an optional accessory

Order No. 492280

- 1x L 2200 230
- 1x disc guard
- 230 Ø grinding
- 1x handle
- 1x clamping flange
- 1x clamping nut M 14
- 1x face spanner

Promotion No. 91 1.32000

Promotions are valid until 31 August 2024 38 Only while stocks last







FLEX

Ø 125

900 watt angle grinder LE 9-11 125



- With speed stabilisation, speed control, soft start, restart interlock after power failure, overload protection
- Variable speed adjustment (6 settings)
- Motor: heavy duty with a high level of efficiency
- Compact, streamlined and ergonomic design Anti-kickback, switches off the motor if the wheel gets jammed
- Disc guard adjustable without tools
- Order No. 512818
- 1x LE 9-11 125
- 1x disc guard
- 125 Ø grinding
- Ix handle
- 1x clamping flange
- 1x clamping nut M 14
- 1x face spanner





2200 / 800 watt angle grinder L 2200 230 / L 811 125



Ø 125

2200 watt angle grinder

- L 2200 230
- Max. grinding tool Ø 230 mm
- No-load speed 6500 /min Power consumption 2200
 - watts
- Tool holder M 14
- Clamping collar Ø 64 mm
- Cable length 4.0 m
- Weight 5.8 kg

Order No. 492302

1x L 2200 230

1x L 811 125

1x carrying case

- 800 watt angle grinder L811125
- Max. grinding tool Ø 125 mm
- No-load speed 12000 /min
- Power consumption 800 watts
- Tool holder M 14
- Clamping collar Ø 40.3 mm •
- Cable length 4.0 m
- Weight 2.0 kg

1700 watt angle grinder LBE 17-11 125 Variable speed



- Also with variable speed 2800-11,500/min
- Heavy-duty, highly-efficient motor
- Longer service life thanks to optimised cooling and modified carbon brush geometry
- Comprehensive dust protection for motor and gearbox
- With mechanical brake, stops the tool in 3.5 seconds
- Disc guard adjustable without tools
- Lockable slide switch
- SoftVib handle with integrated clamping nut wrench and vibration damping

Order No. 502022

- 1x LBE 17-11 125
- 1x disc guard
- 125 Ø grinding
- 1x SoftVib handle
- 1x clamping flange
- 1x clamping nut M 14

Promotion No. 93 2.750⁰⁰

2200 watt angle grinder

Max. grinding tool Ø 230 mm

No-load speed 6500 /min

Power consumption 2200

Clamping collar Ø 64 mm

Tool holder M 14

Cable length 4.0 m

Weight 5.8 kg

L 2200 230

watts



2200 / 1010 watt angle grinder L 2200 230 / L 1001 125

Ø	230
Ø	125

1010 watt angle grinder L 1001 125

- Max. grinding tool Ø 125 mm
- No-load speed 10000 /min
- Power consumption 1010 watts
- Tool holder M 14
- Clamping collar Ø 40.3 mm
- Cable length 4.0 m
- Weight 2.2 kg

Order No. 492310

- 1x L 2200 230
- 1x L 1001 125
- 1x carrying case

Promotion No. 95 2.09000





Cordless TRINOXFLEX kits

18 V cordless belt file FBE 30 18-EC

- Brushless motor, greater efficiency, longer service life
 Unique tool attachment with quick-release coupling
- for changing the four system attachments without using tools Head can be swivelled through 140°. Sanding arms can be used with
- 9 mm or 30 mm Sanding arm adjustable for belt lengths of 520 mm and 533 mm
- Sanding arm adjustable for belt lengths of 520 mm and 53
 Sanding arm working length up to approx 12 cm
- Sanding arm working length up to approx. 12 cm
 Change sanding belt: quickly and without tools

Order No. 532117

- 1x sanding attachment, belt file BF 140
- 2x sanding belts ZIRCOFLEX P60
 2x sanding belts
- ZIRCOFLEX P120

Promotion No. 96

18 V cordless fillet weld sander LKE 152 18-EC

0

0

- Brushless motor, greater efficiency, longer service life
- Unique tool attachment with quick-release coupling for changing the four system attachments without using tools
- For precision work on surfaces, sanding work in particularly tight angles, corners and hard-to-reach places
- Microprocessor control: Speed preselection, speed stabilisation by means of tachogenerator, soft start, restart interlock after power failure, overload protection and temperature monitoring



18 V cordless pipe belt sander BRE 50 18-EC

- Brushless motor, greater efficiency, longer service life
- Unique tool attachment with quick-release coupling for changing the four system attachments without using tools
- High-quality sanding arm with spring suspension: made of light alloy with 2 deflection rollers. For optimum wrap-around of pipes up to max. 270°
- Change sanding belt: quickly and without tools

Order No. 532118

- 1x sanding attachment, pipe belt BR 50
- 2x sanding belts ZIRCOFLEX P60
 2x sanding belts ZIRCOFLEX P120



18 V cordless burnisher BSE 50 18-EC

- Brushless motor, greater efficiency, longer service life
- Unique tool attachment with quick-release coupling for changing the four system attachments without using tools
- Adjustable burnishing attachment, allows working close up to the edge, also suitable for narrow rollers, incl. parallel stop. Tool-free grinding tool change via patented quick-change system
- For optimum finishing of various materials, for burnishing, texturing, polishing, brushing, smoothing, de-rusting and deburring steel and stainless steel surfaces



You'll find the right batteries and chargers on pages 10/11.



Further information about metalworking with the TRINOXFLEX system can be found on our website!

40

1400 watt metal-cutting circular saw CSM 4060



- Exact sawing of metal without cooling fluid
 Chip collection container with viewing
 - window:
 - Large dimensions
 - Can be emptied without using tools
- Guide plate adjustable without using tools, infinitely variable sawing depth adjustment up to 63 mm
- Special carbide-tipped saw blades: nearly burr-free cuts, trimming threaded bars possible without recutting the thread.
- Switch with safety catch and lock
- Maximum cutting depths:
 - Solid material / flat steel: 6 millimetres
 - Round material: 20 mm
 - Hollow sections: 63 mm



Order No. 506044

- 1x CSM 4060
- 2x carbide saw blades for steel
- 1x parallel stop



INCLUDING 800 watt angle grinder L 811 125

850 watt metal-cutting band saw with swivelling saw frame SBG 4910

	Ľ	L: 45°	60/80 mm	68/80 mm	68x55 mm 100x80 mm	60/80 m/min	1335x13 x0.65 mm	4 m
Restart Protection	Quick clamp	Mitre setting	Max. Cutting capacity	Max. Cutting capacity	Max. Cutting capacity	Band speed	Band size	Mains cable

- Can be used with sawing bench or guided manually
- Stepless and tool-free adjustment of the cutting angle from 0° to 45°
- 3-point ball-bearing saw blade guide for optimum blade control







Promotion No. 101 **4.990**00



18 V variable-speed cordless straight grinder DGE 25 18.0-EC



- Very slender and light machine for optimum handling. Only 147mm grip circumference
- Speed preselection in 4 steps (10,000 / 15,000 / 20,000 / 25,000 rpm)

INCLUDING

P-Kit 55 R

Variable-speed cordless straight grinder DGE 8 -32



- Powerful and robust 800 W motor
- Variable speed 10600 32000 rpm
- Slender and light machine for optimum handling.
- . 43 mm clamping neck for stationary fixing or handle attachment
- Handle protective cover for safe machine guiding
- Lockable, On/Off switch at the side



Also available in an L-BOXX®

Bright prospects

Does your heart beat for perfect paint surfaces? Then FLEX Automotive Systems is definitely the right place for you. Here you'll find everything to do with polishing technology.



The features of the machines correspond to the usual basic features. Subject to technical modifications, price changes and errors. All prices are recommended prices plus VAT.

The features of the machines correspond to the usual basic features. Subject to VAT changes, technical changes, price changes and errors. All prices in bold are recommended prices plus VAT.

Your FLEX retailer:

f 🗿 in YouTube